

SC18CL

LBP/MBP Compressor

R404A/R507

220-240V 50Hz


Data Sheet (Replaces CF.54.D1.02)

General

Compressor	SC18CL
Code number	104L2123

Application

Application	LBP/MBP	
Evaporating temperature range	°C	-45 to -5
Voltage range	V/Hz	198 - 254 /50
Motor type	CSR	
Max. ambient temperature	°C	38
Comp. cooling at ambient temp.	32°C	F ₂
	38°C	F ₂

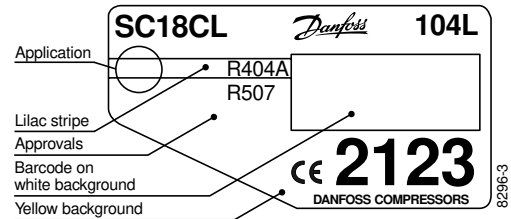

- S = Static cooling normally sufficient
- O = Oil cooling
- F₁ = Fan cooling 1.5 m/s
(compressor compartment temperature equal to ambient temperature)
- F₂ = Fan cooling 3.0 m/s necessary

Design


Displacement	cm ³	17.69
Oil quantity	cm ³	600
Maximum refrigerant charge	g	1300
Free gas vol. in compressor	cm ³	1460
Weight without electrical equipment	kg	13.7

Motor

Motor size	watt	495
LRA (rated after 4 sec. UL984) HST	A	20.0
Cut-in current HST	A	20.0
Resistance, main and start winding (25°C)	Ω	3.7/14.1
Approvals	EN 60335-2-34	

Dimensions

Height	mm	A	219
		B	213
		B1	193
		B2	110
Suction connector	location/I.D. mm	C	10.2 ±0.09
Process connector	location/I.D. mm	D	6.2 ±0.09
Discharge connector	location/I.D. mm	E	6.2 ±0.09
Compressors on a pallet	pcs.	80	

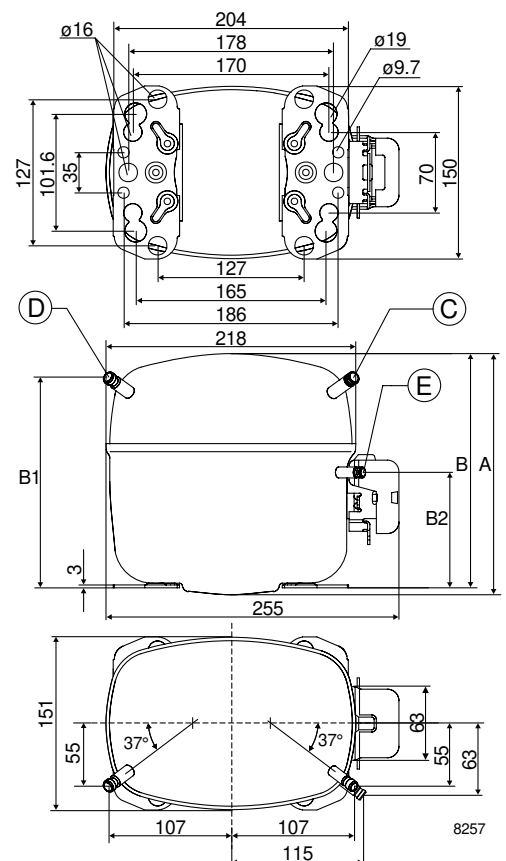

Capacity (EN 12900/CECOMAF)
watt

Comp. °C	-45	-40	-35	-30	-25	-23.3	-20	-15	-10	-5
SC18CL	167	271	395	542	715	781	918	1154	1425	1735

Capacity (ASHRAE)
watt

Comp. °C	-45	-40	-35	-30	-25	-23.3	-20	-15	-10	-5
SC18CL	193	313	457	628	830	907	1067	1342	1659	2022

Power consumption
watt

Comp. °C	-45	-40	-35	-30	-25	-23.3	-20	-15	-10	-5
SC18CL	294	376	455	534	615	643	700	792	894	1008

Current consumption
A

Comp. °C	-45	-40	-35	-30	-25	-23.3	-20	-15	-10	-5
SC18CL	2.61	2.80	3.02	3.29	3.60	3.72	3.96	4.36	4.80	5.29


COP (EN 12900/CECOMAF)
W/W

Comp. °C	-45	-40	-35	-30	-25	-23.3	-20	-15	-10	-5
SC18CL	0.57	0.72	0.87	1.01	1.16	1.21	1.31	1.46	1.59	1.72

COP (ASHRAE)
W/W

Comp. °C	-45	-40	-35	-30	-25	-23.3	-20	-15	-10	-5
SC18CL	0.66	0.83	1.00	1.18	1.35	1.41	1.52	1.69	1.86	2.01

Test conditions	EN 12900/CECOMAF	ASHRAE
Condensing temperature	45°C	45°C
Ambient and suction gas temp.	32°C	32°C
Liquid temperature	45°C	32°C
Fan cooling F ₂ , 220V 50Hz		

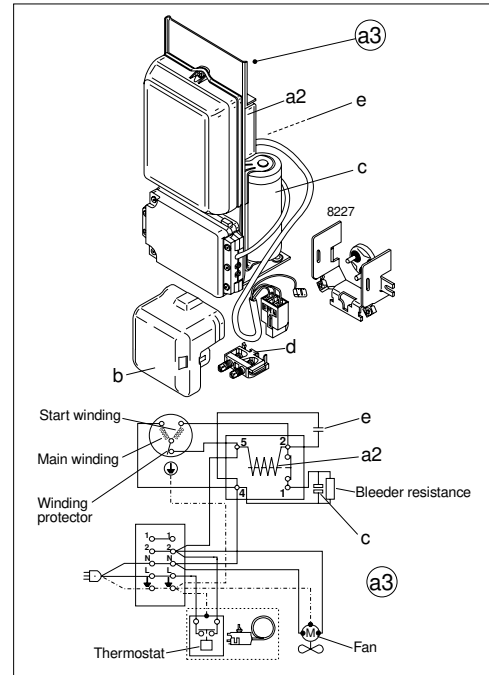
Accessories

Devices	Fig.	SC18CL
Starting device	a3	117-7012 (470 mm cable length) 117-7027 (550 mm cable length) 117-7046 (650 mm cable length) 117-7040 (1000 mm cable length)
Cover	b	103N2009
Starting relay	a2	Components of starting device
Starting capacitor 80 µF	c	
Run capacitor	e	
Cord relief	d	103N1004
Mounting accessories		
Bolt joint for one compressor		118-1917
Bolt joint in quantities		118-1918
Snap-on in quantities		118-1919

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequential changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.