
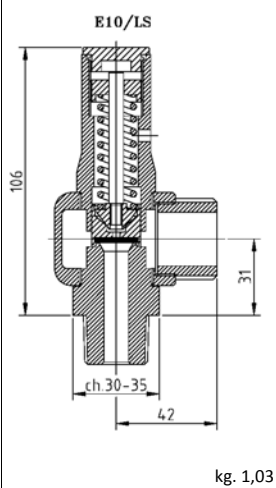


Tipo : Type :	<b>E10/L</b>		do: 10 mm
Omologazione <i>Homologation</i>	PN	Coefficiente efflusso ridotto <i>Low flow coefficient</i>	Campo di taratura <i>Setting range</i>
CE - UKCA	100	0,86	0,3 - 100,0 bar
EAC	100	0,86	0,3 - 100,0 bar
ATEX Ex h II 2 Gb - UKEX	100	0,86	0,3 - 100,0 bar
ATEX Ex h II 2 Db - UKEX	100	0,86	0,3 - 100,0 bar
ASME XIII - CRN (Canada)	150	0,629	1,0 - 106,0 bar
SELO - TSG	150	0,629	1,0 - 106,0 bar

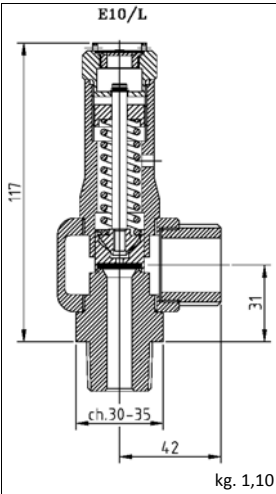

### CONFIGURAZIONE - CONFIGURATION

Materiale <i>Material</i>	Ottone <i>Brass</i>	Mista Ottone-Acciaio inox <i>Mixed Brass-Stainless steel</i>	Acciaio inox <i>Stainless steel</i>
<b>Modelli</b> <i>Model</i>	Con ghiera <i>With ring nut</i> Senza Ghiera <i>Without ring nut</i> / / / / /	Con ghiera <i>With ring nut</i> Senza Ghiera <i>Without ring nut</i> / / / / /	Con ghiera <i>With ring nut</i> Senza Ghiera <i>Without ring nut</i> / / / / /
<b>Sedi di Tenuta</b> <i>Seal System</i>	N.B.R. (Std) -10 / + 100 °C E.P.D.M. -50 / + 150 °C VITON -20 / +200 °C SILICONE -60 / +200 °C PTFE -196 / +250 °C KALREZ -20 / +250 °C /	N.B.R. (Std) -10 / + 100 °C E.P.D.M. -50 / + 150 °C VITON -20 / +200 °C SILICONE -60 / +200 °C PTFE -196 / +250 °C KALREZ -20 / +250 °C Metal -196 / +250 °C	N.B.R. (Std) -10 / + 100 °C E.P.D.M. -50 / + 150 °C VITON -20 / +200 °C SILICONE -60 / +200 °C PTFE -196 / +250 °C KALREZ -20 / +275 °C Metal -196 / +450 °C
<b>Connessione Entrata</b> <i>Inlet Connection</i>	G.1/2" - 3/4" ISO228 R.1/2" - 3/4" EN10226 1/2" - 3/4" NPT DN20-25 PN16-100 3/4" - 1" 150-900 lb / / / /	G.1/2" - 3/4" ISO228 R.1/2" - 3/4" EN10226 1/2" - 3/4" NPT 1" - 1"1/2 Tri Clamp DN20-25 PN16-100 3/4" - 1" 150-900 lb / / / /	G.1/2" - 3/4" ISO228 R.1/2" - 3/4" EN10226 1/2" - 3/4" NPT 1" - 1"1/2 Tri Clamp DN20-25 PN16-100 3/4" - 1" 150-900 lb / / / /
<b>Connessione Uscita</b> <i>Outlet Connection</i>	G.1" ISO228 DN25 PN16-100 1" 150-900 lb / / / /	G.1" ISO228 1"1/2 Tri Clamp DN25 DIN405-11851 DN25 PN16-100 1" 150-900 lb / / /	G.1" ISO228 1"1/2 Tri Clamp DN25 DIN405-11851 DN25 PN16-100 1" 150-900 lb / / /

A richiesta possono essere eseguiti collaudi dai più prestigiosi enti quali: INAIL (area ISPESL), TÜV, RINA, Bureau Veritas, ABS e Lloyd Register.  
On request tests can be made by the most prestigious societies, such as: INAIL (area ISPESL), TÜV, RINA, Bureau Veritas, ABS and Lloyd Register.

**Note:**