

## Komplet - kond. jedinica Embraco Aspera + isparivač KFL

Komplet uključuje:

- ✓ Otvorenu kondenzacijsku jedinicu Embraco Aspera
- ✓ Isparivač KFL s elektrogrijačima (razmak lamela 5 ili 7 mm)
- ✓ Termoekspanzijski ventil Danfoss
- ✓ Filter-sušać Danfoss
- ✓ Magnetski ventil Castel
- ✓ Kontrolno staklo Castel
- ✓ Presostat Ranco
- ✓ Mikroprocesorski kontroler Dixell ili Eliwell
- ✓ Temperature sonde (2 kom)




**Danfoss**

**Castel**  
Italian technology

**dixell**  
COPELAND


**eliwell**  
by Schneider Electric

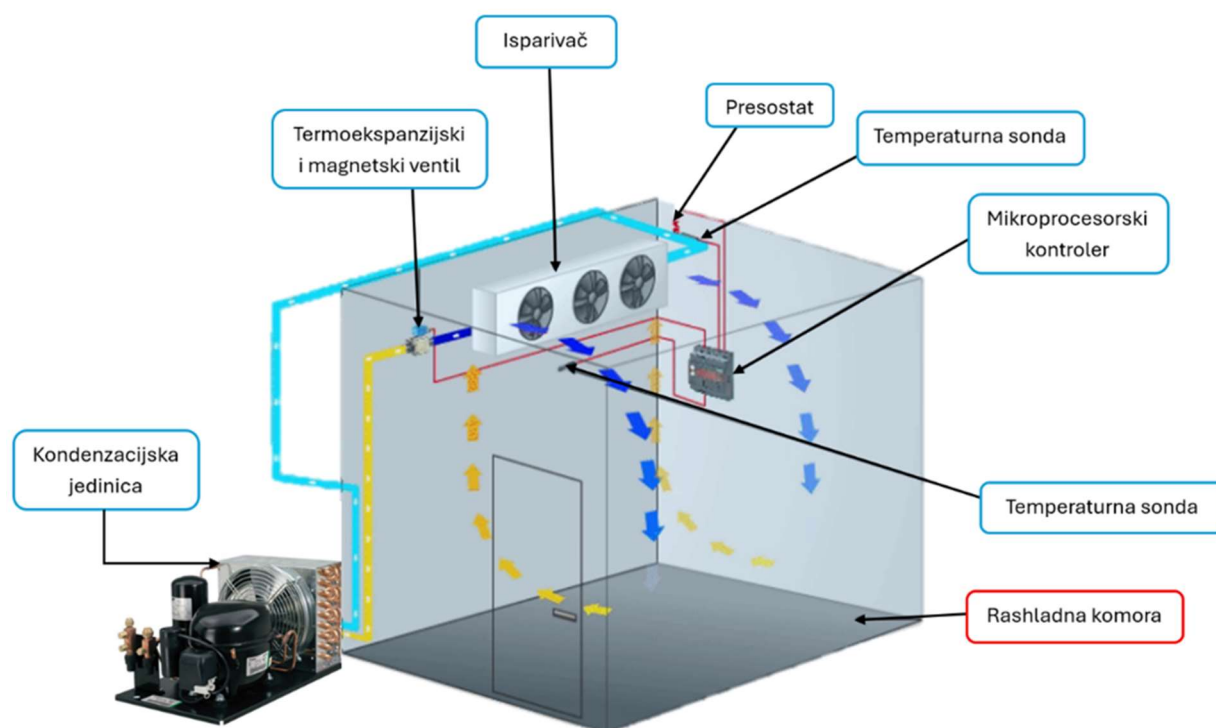

## Komplet - kond. jedinica Embraco Aspera + isparivač KFL



**embraco**  
*Nidec*

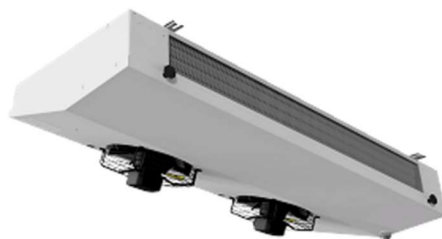

**KFL**  
**EST**

Raspoloživi kapaciteti:

| Šifra kompleta | Kond. jedinica |          | Temp. u komori | Isparivač   | Rashl. kapacitet (W) |
|----------------|----------------|----------|----------------|-------------|----------------------|
|                |                |          | <b>MT</b>      |             |                      |
| 7KK0252        | UNT 6226GK     | 230V/1PH | 2°C            | LTE 181 S4  | 1710                 |
| 7KK0255        | UNJ 9232GK     | 230V/1PH | 2°C            | LTE 181 S4  | 1901                 |
| 7KK0257        | UNJ 9238GK     | 230V/1PH | 2°C            | LTE 185 S4  | 2364                 |
| 7KK0260        | UNJX 6250GK    | 230V/1PH | 2°C            | LTE 205 S4  | 3110                 |
| 7KK0270        | UNJX6250GS     | 380V/3PH | 2°C            | LTE 205 S4  | 3110                 |
| 7KK0272        | USE6015GS      | 380V/3PH | 2°C            | LTE 205 S4  | 3600                 |
| 7KK0275        | USE6018GS      | 380V/3PH | 2°C            | LTE 345 S4  | 4200                 |
| 7KK0278        | USE6021GS      | 380V/3PH | 2°C            | LTE 345 S4  | 4690                 |
|                |                |          | <b>LT</b>      |             |                      |
| 7KK0280        | UNJ2192GJ      | 230V/1PH | -20°C          | CCEH 251 L4 | 708                  |
| 7KK0282        | UNJ2212GK      | 230V/1PH | -20°C          | CCEH 251 L4 | 883                  |
| 7KK0284        | UNJX2219GK     | 230V/1PH | -20°C          | CCEH 251 L6 | 1150                 |
| 7KK0290        | UNJX2219GS     | 380V/3PH | -20°C          | CCEH 251 L6 | 1150                 |
| 7KK0295        | USE2006GS      | 380V/3PH | -20°C          | CCEH 251 L6 | 1200                 |
| 7KK0298        | USE2008GS      | 380V/3PH | -20°C          | CCEH 252 L4 | 1510                 |

\*Napomena: Slike služe samo kao ilustracija.