


NT6230U



ENGINEERING CODE
843EA02

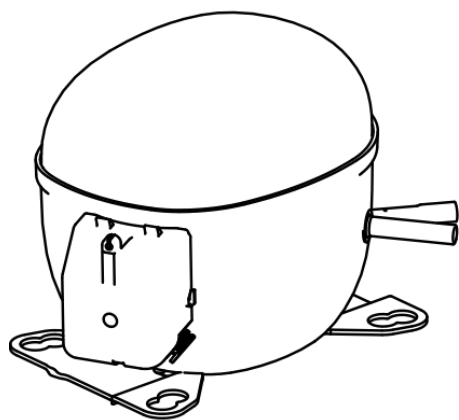

REFRIGERANT
R-290



POWER SUPPLY
220-240 V 50 Hz



APPLICATION
MBP



MOTOR TYPE
CSCR



STANDARD
EN12900



COOLING CAPACITY
1926 W



EFFICIENCY
1.95 W/W



DATA

GENERAL DATA

Model	NT6230U
Type	Hermetic Reciprocating
Technology	ON/OFF
Compressor Application	MBP
Expansion Device	Capillary Tube or Expansion Valve
Compressor Cooling	Fan/220
HP	1 1/4
Starting Torque	HST
Plant	SLOVAKIA

ELECTRICAL DATA

Start Winding Resistance	7.56 Ω at 25°C
Run Winding Resistance	2.22 Ω at 25°C

MECHANICAL DATA

Displacement	27.8 cm ³
Oil Charge	450 ml
Oil Type	AB
Oil Viscosity	ISO32
Weight	16.6 Kg

ELECTRICAL COMPONENTS

Start Capacitor	130-156 µf/330 V
Run Capacitor	20.0 µf/400 V
CSR CSIR BOX	Yes
Starting Device Description	RVA403C-123
Overload Protection	USP-553-84 (internal)

EXTERNAL CHARACTERISTICS

Base Plate	UNI
Tray Holder	NO

Connector	Internal Diameter	Shape	Material
Suction	9.6 mm	VERTICAL	COPPER
Discharge	6.42 mm	VERTICAL	COPPER
Process	6.42 mm	VERTICAL	COPPER

PERFORMANCE

TESTED CONDITIONS

Tested Refrigerant	R-290
Tested Application	MBP
Tested Standard	EN12900
Tested Cooling	Fan
Tested Voltage	220 V
Tested Frequency	50 Hz
Max Refrigerant Charge	400 g
Refrigerant Temperature	Dew

RATED POINTS

Condensing Temperature °C	Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
45	-10	1926	1.95	989	4.84	23.7

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

PERFORMANCE CURVE**Condensing Temperature 35°C**

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-20	1464	1.88	780	3.99	16.21
-15	1829	2.17	842	4.25	20.39
-10	2259	2.48	911	4.52	25.31
-5	2757	2.81	980	4.80	31.07
0	3328	3.20	1040	5.08	37.78
5	3976	3.67	1082	5.37	45.53
10	4704	4.28	1098	5.67	54.42

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

PERFORMANCE CURVE**Condensing Temperature 45°C**

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-20	1241	1.46	850	4.22	15.11
-15	1554	1.71	909	4.52	19.01
-10	1926	1.95	989	4.84	23.70
-5	2363	2.18	1082	5.18	29.27
0	2868	2.43	1178	5.54	35.82
5	3445	2.71	1269	5.92	43.46
10	4098	3.04	1347	6.31	52.27


Test Condition: Subcooling 0 K, Return Gas 20 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

PERFORMANCE CURVE**Condensing Temperature 55°C**

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-10	1620	1.56	1038	5.24	22.25
-5	1989	1.75	1138	5.68	27.54
0	2422	1.93	1254	6.15	33.85
5	2922	2.12	1378	6.65	41.28
10	3494	2.33	1501	7.18	49.93

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

ENVELOPE

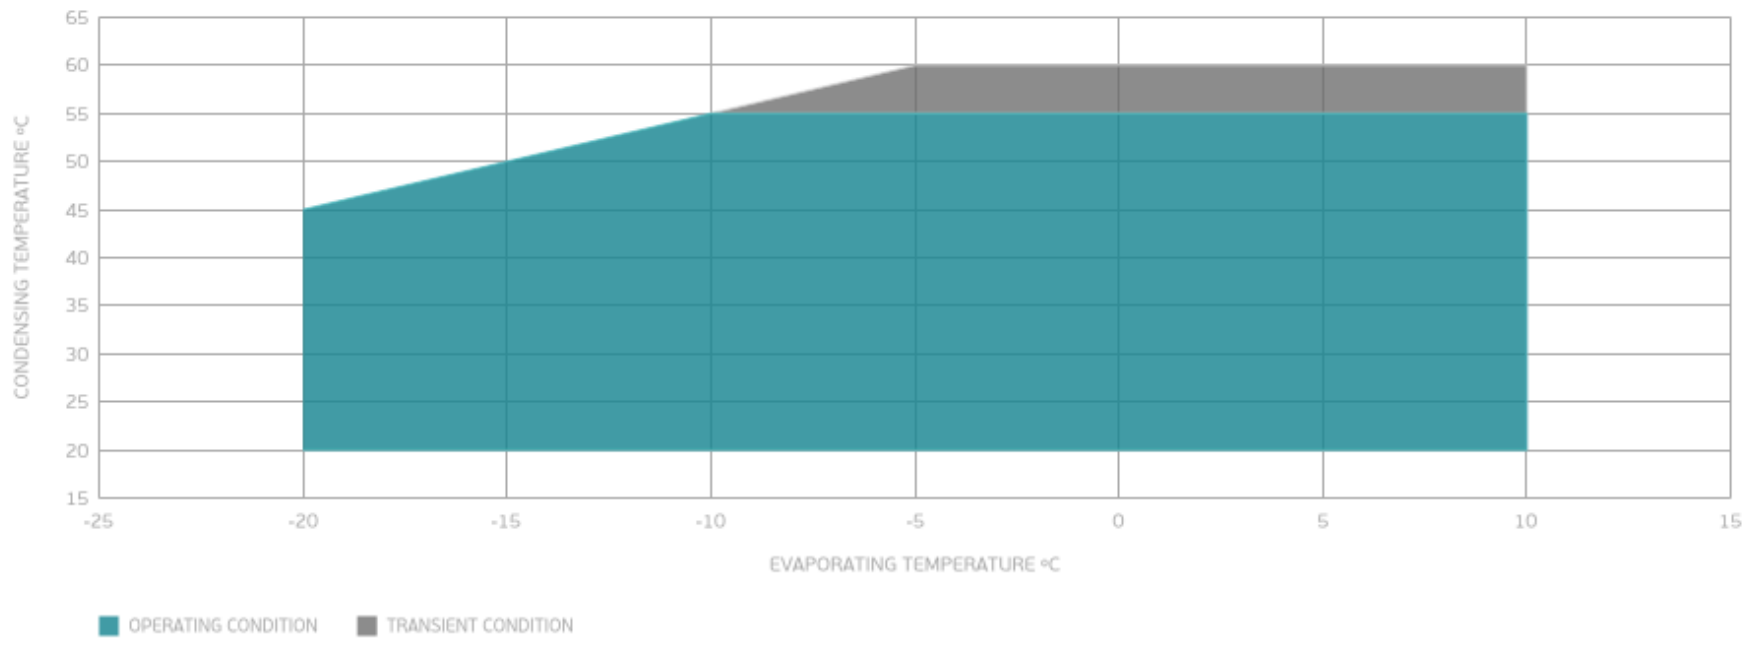

EXTERNAL DIMENSIONS

