

## Komplet - kond. jedinica Embraco Aspera + isparivač LU-VE

### Komplet uključuje:

- ✓ Otvorenu kondenzacijsku jedinicu Embraco Aspera
- ✓ Isparivač LU-VE s elektrogrijačima (razmak lamela 5 ili 7 mm)
- ✓ Termoekspanzijski ventil Danfoss
- ✓ Filter-sušać Danfoss
- ✓ Magnetski ventil Castel
- ✓ Kontrolno staklo Castel
- ✓ Presostate Ranco
- ✓ Mikroprocesorski kontroler Dixell ili Eliwell
- ✓ Temperaturne sonde (2 kom)




**Danfoss**

**Castel**  
Italian technology

**dixell**  
COPELAND

**eliwell**  
by Schneider Electric

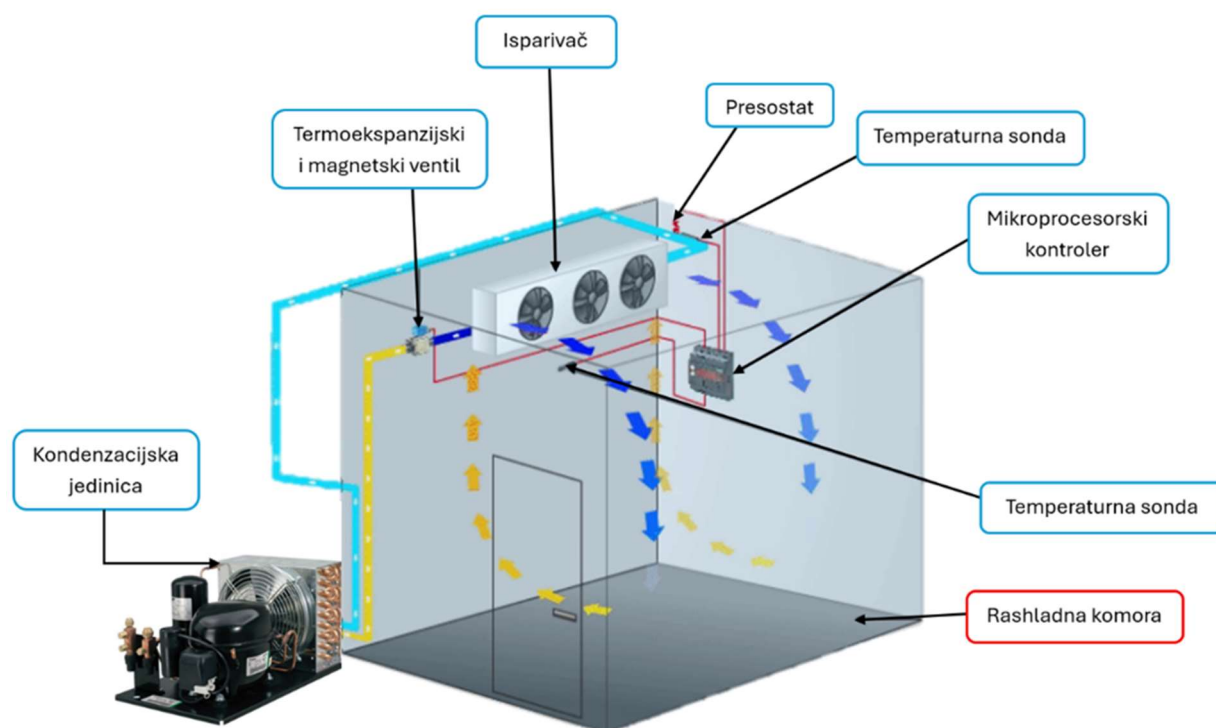

## Komplet - kond. jedinica Embraco Aspera + isparivač LU-VE



**embraco**  
*Nidec*



**LU-VE**  
EXCHANGERS

Raspoloživi kapaciteti:

| Šifra kompleta | Kond. jedinica |          | Temp. u komori | Isparivač    | Rashl. kapacitet (W) |
|----------------|----------------|----------|----------------|--------------|----------------------|
|                |                |          | <b>MT</b>      |              |                      |
| 7KK0100        | UNEK6210GK     | 230V/1PH | 2°C            | SHS12        | 653                  |
| 7KK0110        | UNEK6213GK     | 230V/1PH | 2°C            | SHS13        | 880                  |
| 7KK0120        | UNEK6217GK     | 230V/1PH | 2°C            | SHS18        | 1078                 |
| 7KK0130        | UNT 6222GK     | 230V/1PH | 2°C            | SHS22        | 1325                 |
| 7KK0140        | UNT 6226GK     | 230V/1PH | 2°C            | SHS26        | 1710                 |
| 7KK0150        | UNJ 9232GK     | 230V/1PH | 2°C            | SHS26        | 1901                 |
| 7KK0160        | UNJ 9238GK     | 230V/1PH | 2°C            | SHS32        | 2364                 |
| 7KK0165        | UNJX 6250GK    | 230V/1PH | 2°C            | LTE 205 S4*  | 3110                 |
| 7KK0170        | UNJX6250GS     | 380V/3PH | 2°C            | FHA41        | 3110                 |
| 7KK0180        | USE6015GS      | 380V/3PH | 2°C            | FHA53        | 3600                 |
| 7KK0190        | USE6018GS      | 380V/3PH | 2°C            | FHA53        | 4200                 |
| 7KK0200        | USE6021GS      | 380V/3PH | 2°C            | FHA79        | 4690                 |
|                |                |          | <b>LT</b>      |              |                      |
| 7KK0210        | UNJ2192GJ      | 230V/1PH | -20°C          | F27HC16      | 708                  |
| 7KK0220        | UNJ2212GK      | 230V/1PH | -20°C          | F27HC16      | 883                  |
| 7KK0225        | UNJX2219GK     | 230V/1PH | -20°C          | CCEH 251 L6* | 1150                 |
| 7KK0230        | UNJX2219GS     | 380V/3PH | -20°C          | F27HC23      | 1150                 |
| 7KK0240        | USE2006GS      | 380V/3PH | -20°C          | F27HC23      | 1200                 |
| 7KK0250        | USE2008GS      | 380V/3PH | -20°C          | F27HC31      | 1510                 |

\*Isparivači proizvođača KFL

\*\*Napomena: Slike služe samo kao ilustracija.